


KABELDURCHFÜHRUNGEN MIT ASYMMETRISCHEM BUND
CABLE GROMMETS WITH ASYMMETRIC COLLAR

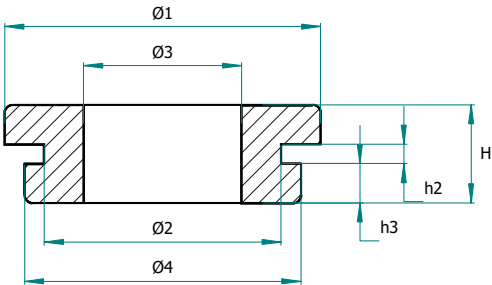

Artikel Nr. <i>Part no.</i>	Gesamt Ø <i>Total Ø</i>	Loch Ø <i>Hole Ø</i>	Kabel Ø <i>Cable Ø</i>	Ø4 <i>Ø4</i>	Gesamthöhe <i>Total height</i>	Spalt <i>Gap</i>		Material <i>Material</i>	
	Ø1	Ø2	Ø3	Ø4	H	h2	h3		
1000	6,0	4,0	1,6	-	5,0	1,5	1,8	EB	
0990	7,0	4,0	2,0	6,2	4,0	1,0	1,2	EB	
1019	12,0	6,0	4,0	9,0	6,0	1,5	2,0	EB	
1058	16,7	10,0	6,0	13,7	10,0	1,6	4,2	EB	
1036	17,0	11,8	10,0	-	7,0	2,0	2,0	EB	

Information:

EB = EPDM, schwarz

Toleranzen nach (DIN ISO 3302, Teil 2 M2F)
Irrtum vorbehalten

Information:

EB = EPDM, black

General measuring tolerances (DIN ISO 3302, section 2 M2F)
Errors excepted

